


# UNIDAD INTERIOR CASSETTE 4 VÍAS



Metal

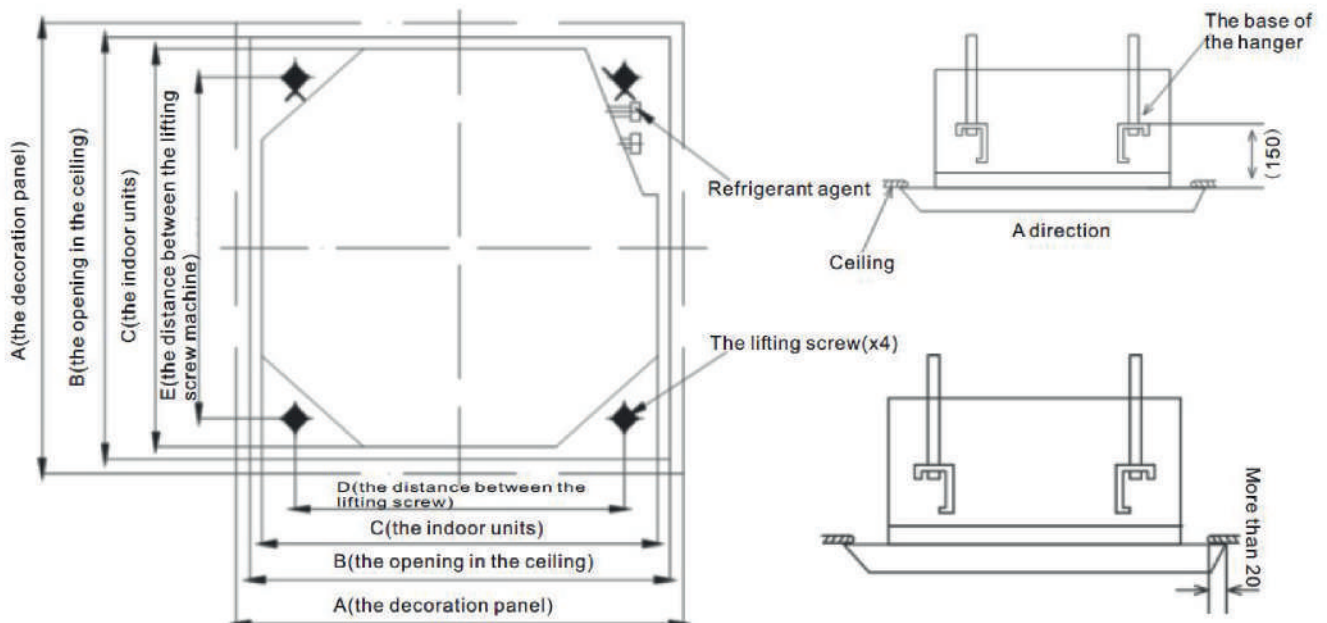

## DIMENSIONES:

MODEL (KBTU/h)	DIMENSION (H) mm
24	230
36, 60	285

MODEL (KBTU/h)	DIMENSION (H) mm				
	A	B	C	D	E
24, 36, 60	950	890	840	680	780



Model			CCR-24CR2	CCR-36CR2	CCR-60CR2
Cooling	Capacity	Btu/h	24000	36000	60000
	Input	W	2733	4125	6912
	Rated current(Indoor unit)	A	0,7	0,73	0,8
MCA		A	1,50	1,50	3,00
Capacity	Input	W	102	102	160
	Speed(Hi/Me/Lo)	r/min	850/730/580	850/730/580	800/750/650
Indoor coil	Number of rows		2	2	2
	Tube pitch(a)xrow pitch(b)	mm	21×13.37	21×13.37	21×13.37
	Fin spacing	mm	1,45	1,45	1,45
	Fin type		Hydrophilic	Hydrophilic	Hydrophilic
	Tube outside dia. and type	mm	Φ7	Φ7	Φ7
			Inner grooved	Inner grooved	Inner grooved
Number of circuits			8	8	12
Indoor air flow(High speed)		CFM	700	900	1120
Indoor unit	Dimension(W*D*H)	Body(mm)	840×840×230	840×840×230	840×840×285
		Panel(mm)	950×950×50	950×950×50	950×950×50
	Packing(W*D*H)	Body(mm)	920×920×265	920×920×265	920×920×310
		Panel(mm)	1030×1030×105	1030×1030×105	1030×1030×105
	Net/Gross weight	Body(Kg)	28/32	28/32	31/35
		Panel(Kg)	5.4/8.0	5.4/8.0	5.4/8.0
Refrigerant type			R410A	R410A	R410A
Refrigerant piping	Liquid side/Gas side	in	Φ3/8 / Φ5/8	Φ3/8 / Φ3/4	Φ3/8 /Φ 3/4
Drainage pipe		mm	25	25	25
Standard controller			remote controller		
Power wiring		mm <sup>2</sup>	3×1.0	3×1.0	3×1.0
Operation temp		°C	16~32	16~32	16~32
Ambient temp		°C	18~43	18~43	18~43
Application area		m <sup>2</sup>	28~50	40~70	60~105