


# UNIDAD INTERIOR PISO TECHO

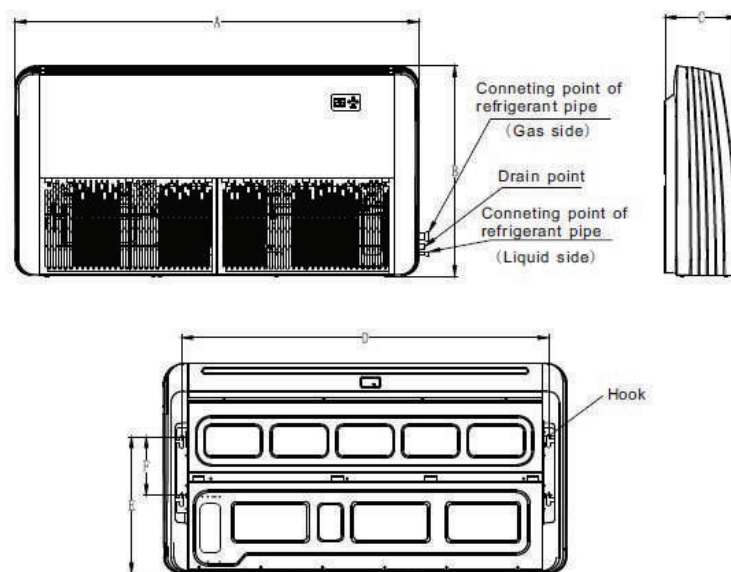

## DIMENSIONES:

Model (kB tu/h)	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)	F(mm)
36	1300	675	235	1185	440	188
60	1670	675	235	1553	440	188

# ESPECIFICACIONES TÉCNICAS:



Model (Floor Ceiling Indoor Unit)			CUAi-36CR2	CUAi-60CR2
Power supply		V-Ph-Hz	220V-1Ph-60Hz	220V-1Ph-60Hz
Cooling	Capacity	Btu/h	36000	60000
MCA		A	1,50	3,00
Operation Control		\	Remote controller	Remote controller
Indoor coil	Number of rows		3	3
	Tube pitch(a)xrow pitch(b)	mm	21 X 13.37	21 X 13.37
	Fin spacing	mm	1,4	1,4
	Fin type		Hydrophilic	Hydrophilic
	Tube outside dia. and type	mm	7	7
			Inner grooved	Inner grooved
	Coil length x height x width	mm	948×252×40.11	1318×252×70
Number of circuits			4	5
Indoor air flow(High speed)		CFM	1060	2000
Indoor unit	Dimension(W*H*D)	Body (mm)	1250×235×675	1670×235×675
	Packing(W*H*D)	Body (mm)	1380×765×325	1750×770×325
	Net/Gross weight	Body(Kg)	32/37	40/46
Indoor fan motor	Input	W	360	135*2
	Output	W	180	70*2
	Speed(hi/mi/lo)	r/min	1330/1230/1130	1310/1139/1060
Refrigerant piping	Liquid side/ Gas side	in	Φ3/8 / Φ 3/4	Φ3/8 / Φ3/4
Connection wiring	Power wiring	mm <sup>2</sup>	3x1.0	3x1.0
Operation temp		°C	16-32	16-32
Draining pipe dimension		mm	Φ25	Φ25